


# Embedded Graphics Drivers in Mesa

Neil Roberts




# About GPUs


- It is a specialized electronic circuit designed to rapidly manipulate and alter memory to accelerate the creation of images in a frame buffer intended for output to a display device. Wikipedia.

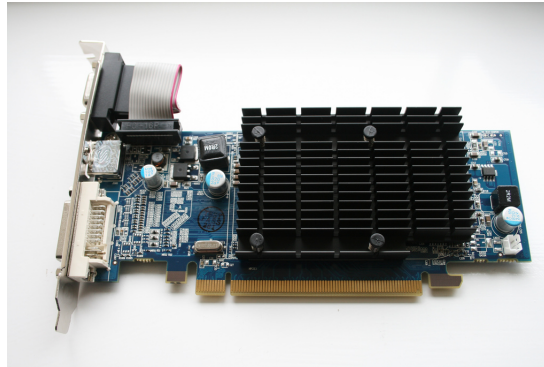


- They are becoming increasingly general purpose processors that can run programs (shaders).
- They are highly threaded and typically use SIMD to operate on multiple inputs at the same time.
- Still contain fixed function pieces for graphics-specific functions:
  - Texture sampling
  - Primitive assembly
  - etc



# Linux graphics stack




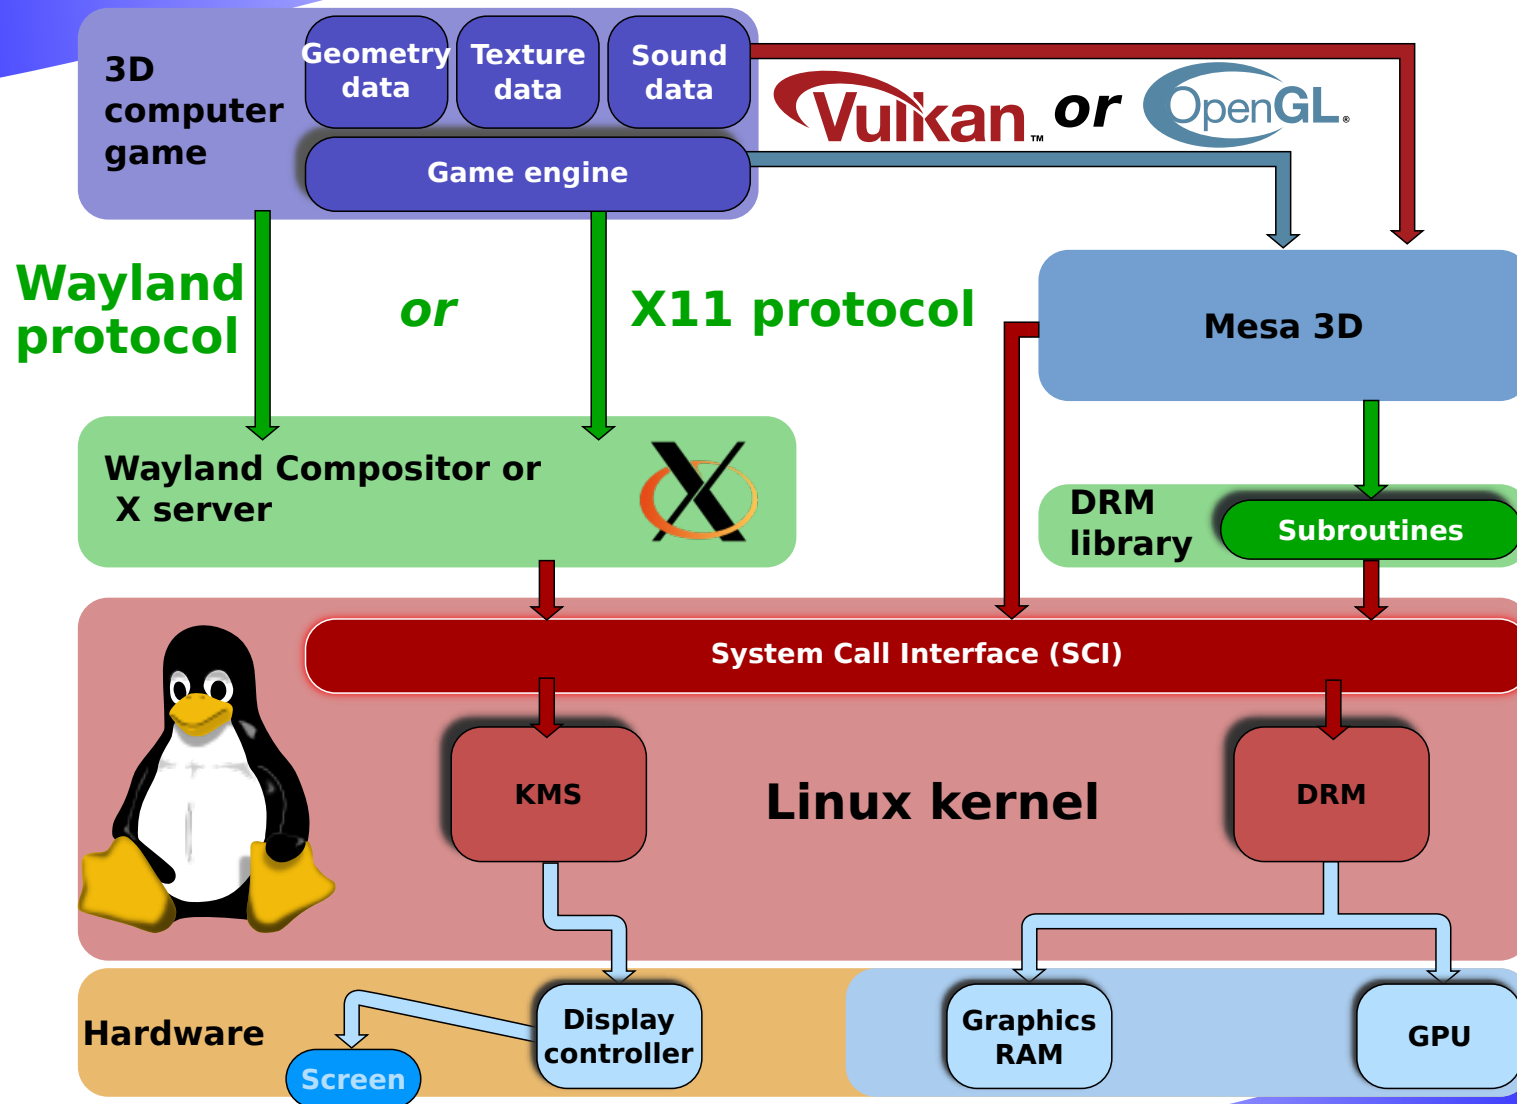



# Graphics APIs



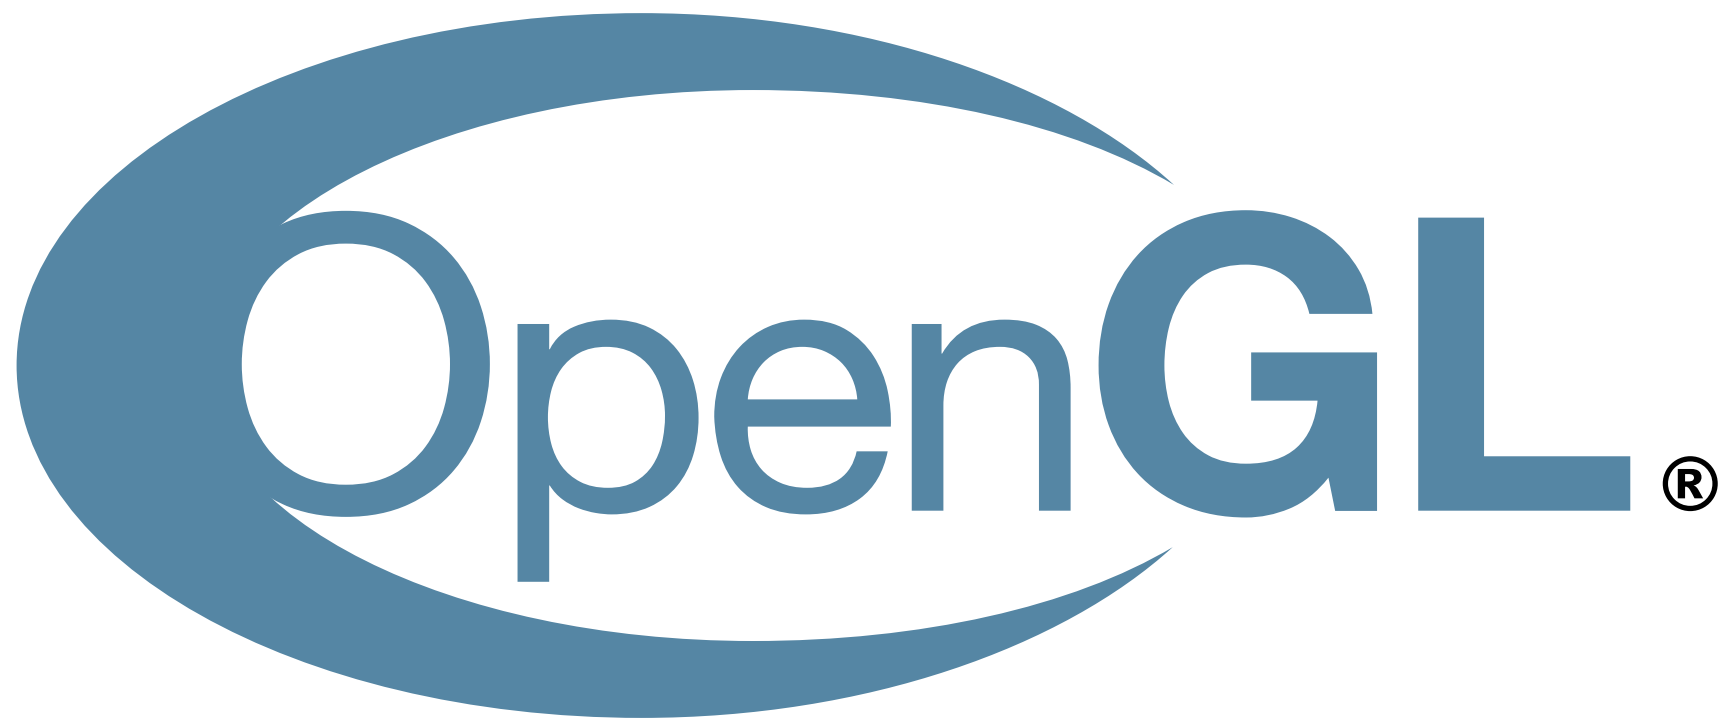

- OpenGL 1.0 was released in January 1992 by Silicon Graphics (SGI).
- Based around SGI hardware of the time which had very fixed functionality.
- Eg, explicit API to draw a triangle with a colour:

```
/* Set a blue colour */
glColor3f(0.0f, 0.0f, 1.0f);
/* Draw a triangle, describing its points */
glBegin(GL_TRIANGLES);
    glVertex3f(0.0f,1.0f,0.0f);
    glVertex3f(-1.0f,-1.0f,0.0f);
    glVertex3f(1.0f,-1.0f,0.0f);
glEnd();
```



- In 2004 OpenGL 2.0 was released.
- Introduced the concept of shaders.
- Can now influence the rendering with programs called shaders.
- Eg, choose a colour programatically:

```
void main()
{
    /* Choose the colour based on the X-position of the pixel */
    gl_FragColor = vec4(gl_FragCoord.x * 0.008 - 1.0, 0.0, 0.0, 1.0);
}
```

- In later versions of GL more and more functionality is moved into the programmable shaders.
- Much more programmable, much less fixed-function.
- Inputs are more often given in buffers rather than via API calls.
- Eg, vertex data now in a buffer:

**Buffer containing  
vertices**

#	Position	Colour
-1	-1	0xff0000ff
0	-1	0xff0000ff
-1	0	0xff0000ff
0	-1	0xff0000ff
-1	0	0xff0000ff
0	0	0xff0000ff

**Commands describing  
buffer layout**

```
glVertexAttribPointer(0, 2, GL_FLOAT,  
                      GL_FALSE, 12, 0);  
glVertexAttribPointer(1, 4, GL_UNSIGNED_BYTE,  
                      GL_TRUE, 12, 8);
```


# OpenGL ES

- Simplified version of OpenGL targetting embedded devices.
- Removes most of the legacy cruft and things that are hard to implement in hardware.
- Is increasingly similar to modern versions of OpenGL which also try to deprecate old functionality.

The Vulkan logo features a stylized, dark red swoosh that curves from the left, passing behind the word "Vulkan". The word "Vulkan" is written in a bold, dark red, sans-serif font. To the right of the word is a small, black "TM" trademark symbol. The entire logo is centered horizontally on a white background, with blue decorative waves at the top and bottom edges.

**Vulkan**™

- Vulkan 1.0 released in 2016
- Clean break from legacy OpenGL
- Much less driver overhead
- Everything is specified in buffers
- The application has the responsibility to manage buffers and synchronisation.
- Harder to use but allows applications to exploit the hardware better
- Suitable for both embedded and desktop hardware

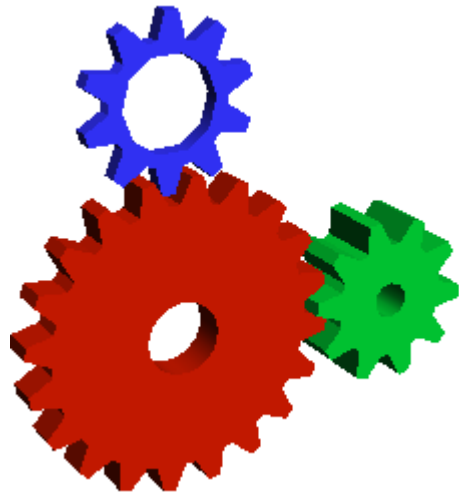

# Mesa

- Open-source implementation of the OpenGL and Vulkan specifications for a variety of hardware on user-space as a library.
- The Mesa project was originally started by Brian Paul.
  - Version 1.0 released in February 1995.
  - Originally used only software rendering
  - Now has support for many different hardware devices
  - Current version is 19.2.

- There are drivers for:
  - Intel (i965, i915, anv)
  - AMD (radv, radeonsi, r600)
  - NVIDIA (nouveau)
  - Imagination Technologies (imx)
  - Broadcom (vc4, vc5)
  - Qualcomm (freedreno)
  - Software renderers (classic swrast, softpipe, llvmpipe, OpenSWR)
  - VMware virtual GPU
  - Etc



- Supports:
  - OpenGL 4.6
  - OpenGL ES 3.2
  - Vulkan 1.1
- All are the latest versions
- Caveat: not all drivers support the latest version

# Mesa matrix

## Leaderboard

There is a total of **249** extensions to implement. The ranking is based on the number of extensions done by driver.


#	Driver	Extensions	OpenGL	OpenGL ES
1	mesa	(95.6%) 238	4.6	3.2
2	radeonsi	(92.0%) 229	4.5	3.2
3	i965	(91.2%) 227	4.6	3.2
4	nvc0	(88.4%) 220	4.5	3.1
5	r600	(81.5%) 203	4.5	3.1
6	virgl	(80.7%) 201	4.3	3.2
7	softpipe	(74.7%) 186	3.3	N/A
8	freedreno	(70.3%) 175	3.1	3.1
9	llvmpipe	(69.5%) 173	3.3	N/A
10	nv50	(61.0%) 152	3.3	N/A
11	swr	(60.2%) 150	3.3	N/A
12	etnaviv	(25.7%) 64	N/A	N/A



# Architecture of Mesa



# Mesa

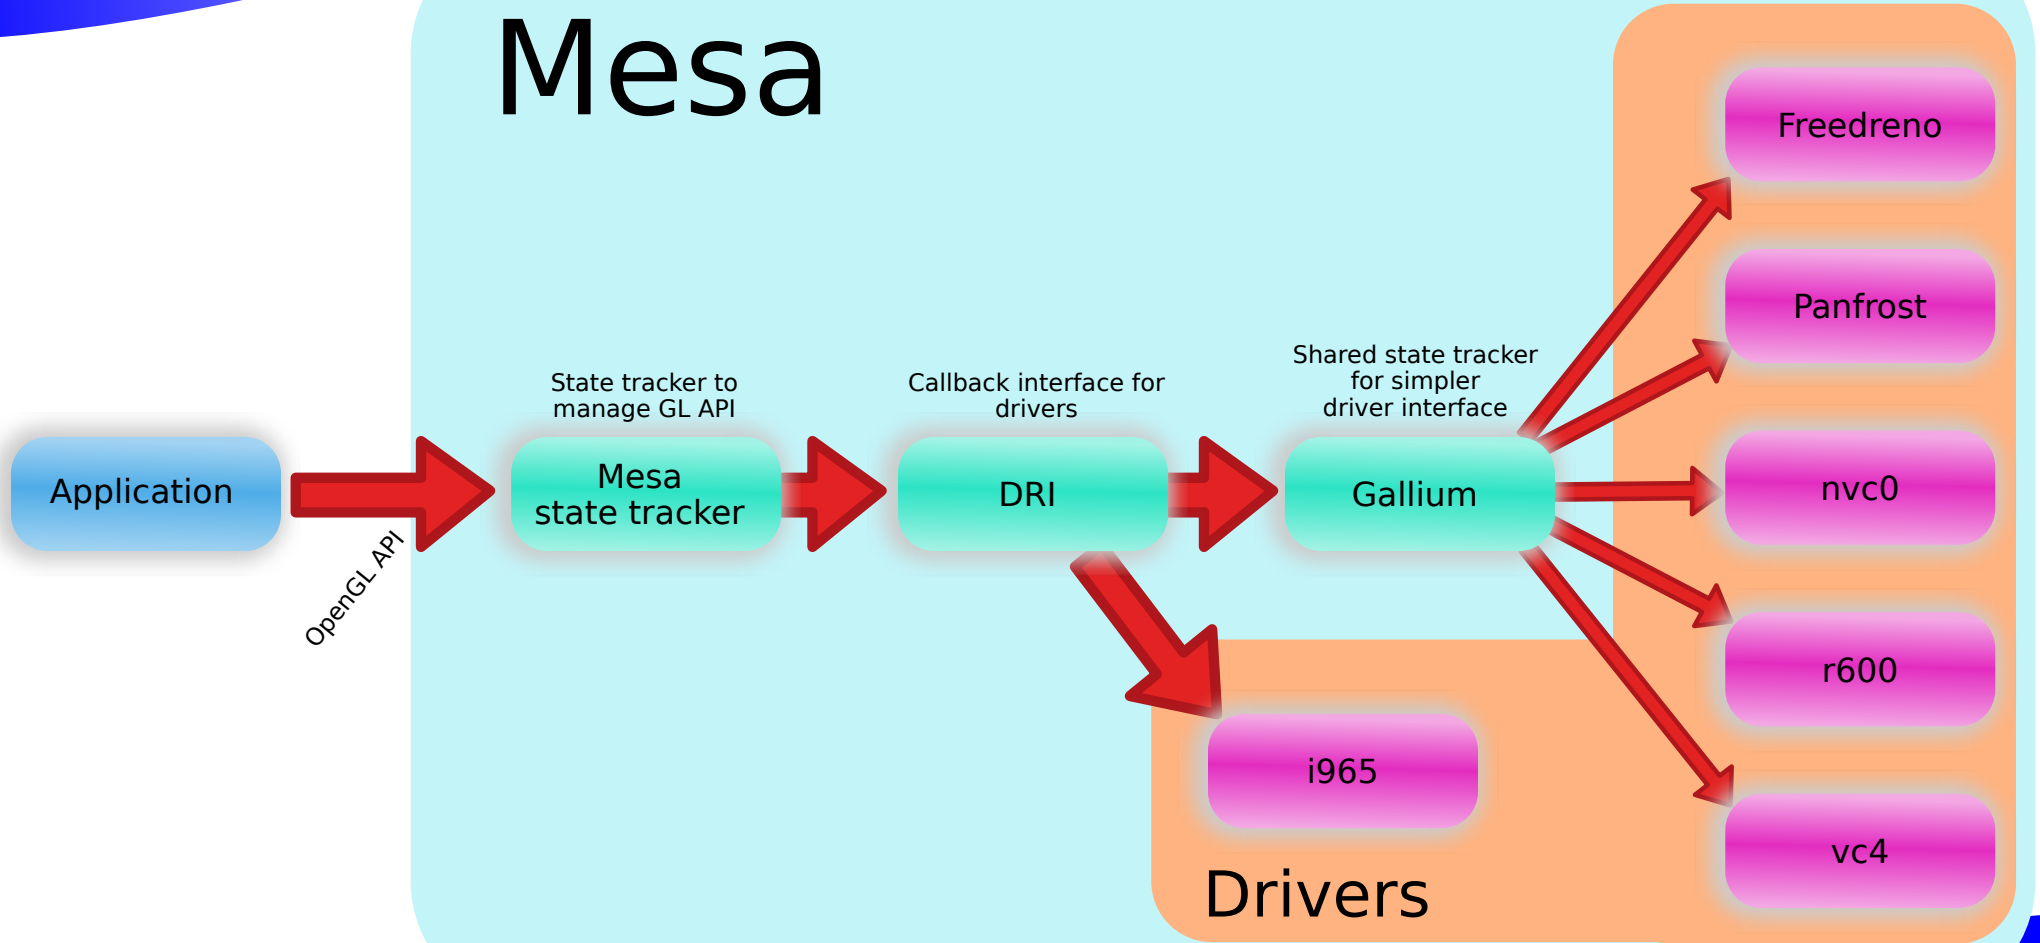

- Mesa has a loader that selects the driver by asking for the vendor id, chip id... from the kernel driver via DRM.
- There is a map of PCI IDs and user-space Mesa drivers.
- When it is found, Mesa loads the respective driver and sees if the driver succeeds
- In case of failure, the loader tries software renderers.
- It is possible to force software renderer
  - LIBGL ALWAYS SOFTWARE=1


- The GL API is filtered through the Mesa state tracker into a simpler set of callbacks into the driver.
  - This handles many things such as GL's weird object management.
  - Unifies different APIs from different versions of GL.
- For the i965 Intel driver, these callbacks are handled directly.
- For most other drivers, Gallium is used as an extra layer.
  - This handles even more state tracking such as caching state objects.
  - Drivers have even less code to implement.



# Compiler architecture



# Mesa

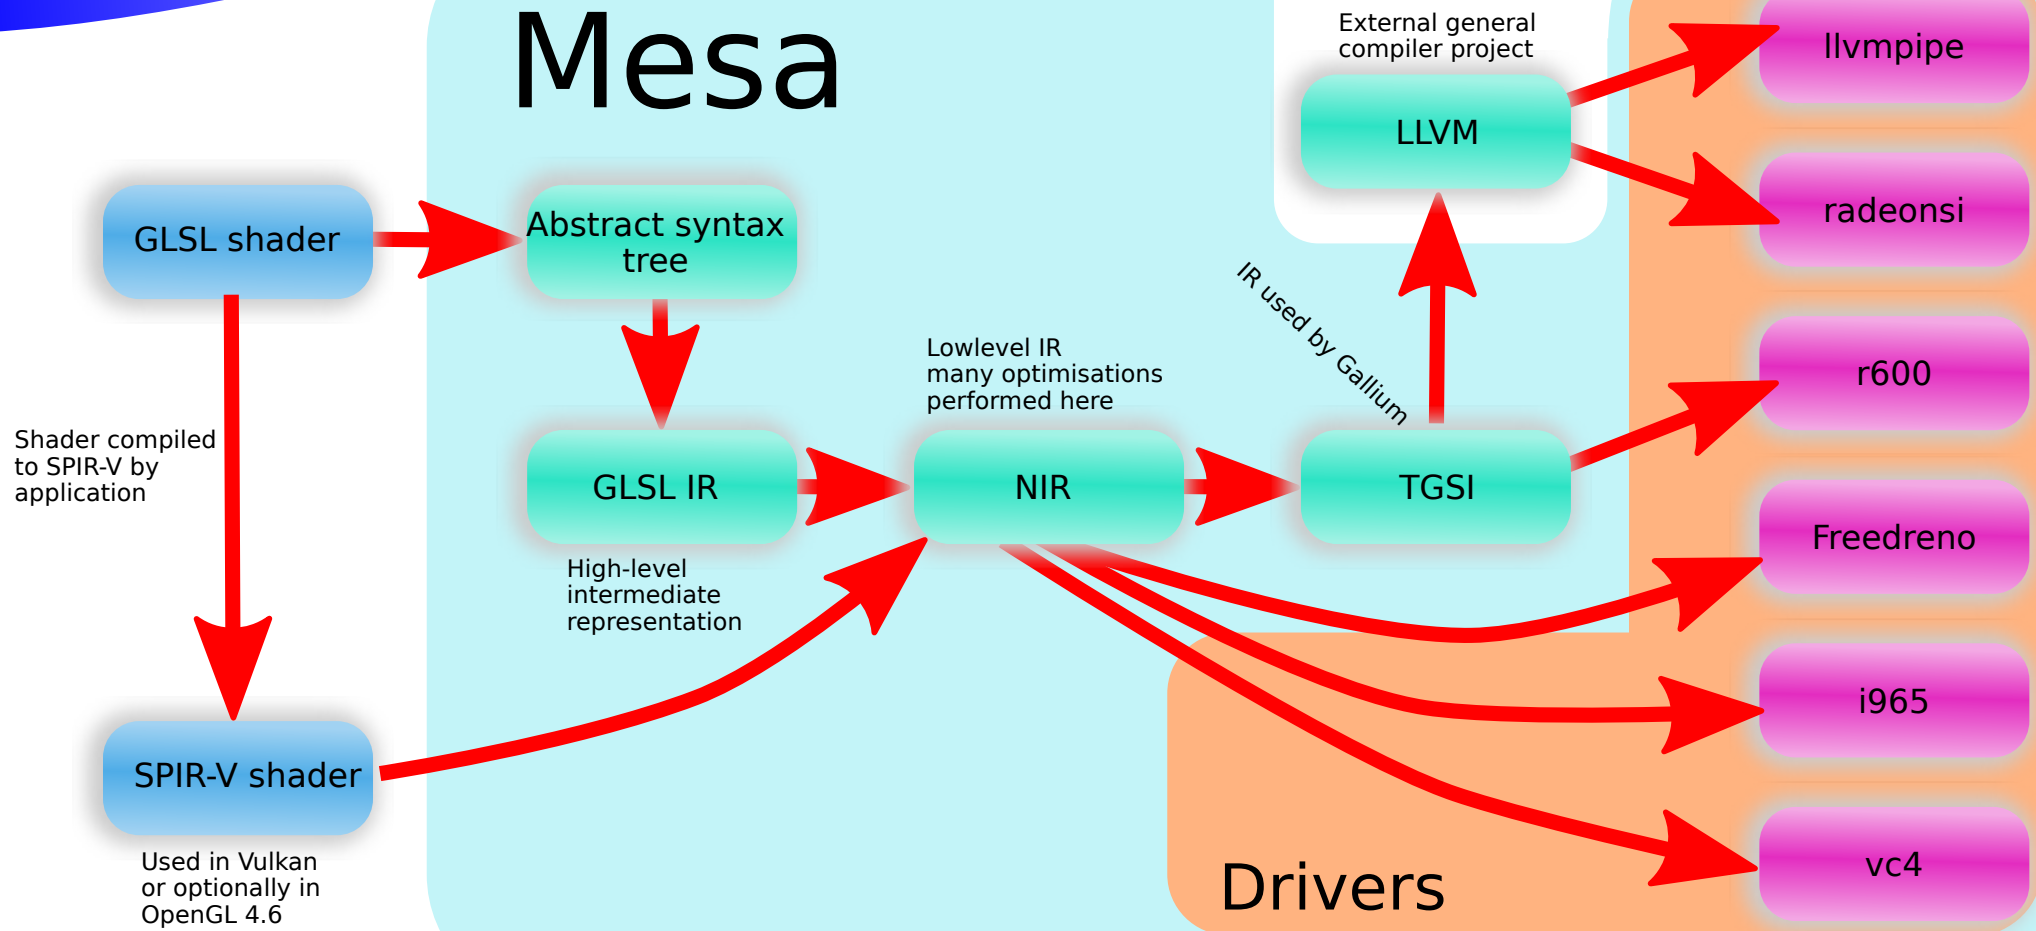



# GLSL example

```
uniform vec4 args1, args2;  
  
void main()  
{  
    gl_FragColor = log2(args1) + args2;  
}
```

# GLSL IR

GLSL IR for native fragment shader 3:

```
(
(declare (location=2 shader_out ) vec4 gl_FragColor)
(declare (location=0 uniform ) vec4 args1)
(declare (location=1 uniform ) vec4 args2)
( function main
  (signature void
    (parameters)
    (
      (assign (xyzw)
        (var_ref gl_FragColor)
        (expression vec4 + (expression vec4 log2 (var_ref args1) )
          (var_ref args2) ) )
    ))
  )
)
```

# NIR

```
impl main {  
    block block_0:  
        /* preds: */  
        vec1 32 ssa_0 = load_const (0x00000000 /* 0.000000 */)   
        vec4 32 ssa_1 = intrinsic load_uniform (ssa_0) (0, 16, 160)  
        vec1 32 ssa_2 = flog2 ssa_1.x  
        vec1 32 ssa_3 = flog2 ssa_1.y  
        vec1 32 ssa_4 = flog2 ssa_1.z  
        vec1 32 ssa_5 = flog2 ssa_1.w  
        vec4 32 ssa_6 = intrinsic load_uniform (ssa_0) (16, 16, 160)  
        vec1 32 ssa_7 = fadd ssa_2, ssa_6.x  
        vec1 32 ssa_8 = fadd ssa_3, ssa_6.y  
        vec1 32 ssa_9 = fadd ssa_4, ssa_6.z  
        vec1 32 ssa_10 = fadd ssa_5, ssa_6.w  
        vec4 32 ssa_11 = vec4 ssa_7, ssa_8, ssa_9, ssa_10  
        intrinsic store_output (ssa_11, ssa_0) (4, 15, 0, 160)  
        /* succs: block_1 */  
    block block_1:  
}
```

# Intel i965 instruction set

```
START B0 (54 cycles)
math log(16)    g3<1>F          g2<0,1,0>F      null<8,8,1>F
math log(16)    g5<1>F          g2.1<0,1,0>F     null<8,8,1>F
math log(16)    g7<1>F          g2.2<0,1,0>F     null<8,8,1>F
math log(16)    g9<1>F          g2.3<0,1,0>F     null<8,8,1>F
add(16)         g120<1>F         g3<8,8,1>F       g2.4<0,1,0>F
add(16)         g122<1>F         g5<8,8,1>F       g2.5<0,1,0>F
add(16)         g124<1>F         g7<8,8,1>F       g2.6<0,1,0>F
add(16)         g126<1>F         g9<8,8,1>F       g2.7<0,1,0>F
sendc(16)       null<1>UW        g120<8,8,1>UD     0x90031000
render MsgDesc: RT write SIMD16 LastRT mlen 8 rlen 0

END B0
```



# Embedded drivers




# Freedreno

- For Qualcomm Adreno devices
- Started by Rob Clark in 2012
- Reversed engineered
- Supports GL 3.1 and GLES 3.1
- Continued development by Google and Igalia

# Devices

- Phones/Tablets:
  - Nexus 4 (a3xx)
  - Nexus 7 Flo (a3xx)
  - Pixel 3a (a6xx)
- ARM boards:
  - Inforce 6540 (a4xx)
  - Inforce 6640 (a5xx)
  - bSTem (a3xx)
  - apq8074 dragonboard (a3xx)



# vc4

- For Broadcom VideoCore IV GPUs
- Used in the Raspberry Pi 3
- Written by Eric Anholt while working at Broadcom
- Developed using the released docs from Broadcom
- Supports OpenGL ES 3.1
- Under continued development including by Igalia




# vc3d

- Project to create a driver for the VideoCore VI GPU in the Raspberry Pi 4
- Very different architecture to the previous one
- Also started by Eric Anholt
- Being continued by Igalia



# Panfrost

- For ARM Mali Txxx (Midgard) and Gxx (Bifrost) GPUs
- Used in Chromebooks
- Started by Alyssa Rosenzweig
- Reverse engineered
- Merged into Mesa master
- ARM is now contributing to it too
- Demo from XDC 2019 shows running desktop GL 2.0
- They are looking to support GL 3.0 and Vulkan

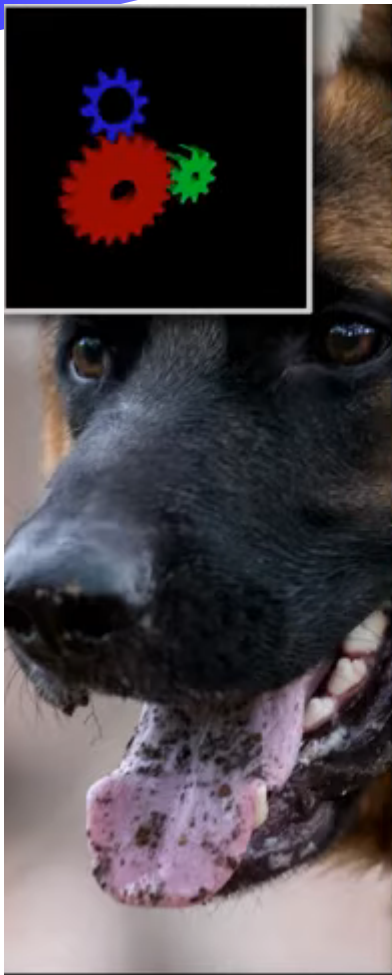



Thanks

Questions?

